



decorative downlight luminaire for suspended ceilings, for LED light sources with hi CRI>90


TECHNICAL DATA	Mounting: in the ceiling, with mounting brackets (included) Body: aluminum Colour: white
ELECTRICAL DATA	Power supply efficiency: >85% Electrical connection: max 2x1,5 mm ² wire Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED
OPTICAL DATA	Light distribution: circular Way of lighting: direct Reflector: aluminum, polished, faceted
ADDITIONAL INFO	Available on request: DALI Operating temperature range: 0°C ... +30°C Lifetime (L70B50): 50 000 h
GENERAL DATA	Warranty: 3 years + 2 years after project registration Application: boutiques, delicatessen, jeweler, shopping centers, supermarkets, museums




Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Degree of water and dust protection: IP20								
030281.5L01.311	36°	22	24	2000	1650	69	3000	>90
030281.5L01.321	76°	22	24	2000	1700	71	3000	>90
030281.5L02.311	36°	21	23	2000	1600	70	4000	>90
030281.5L02.321	76°	21	23	2000	1650	72	4000	>90
030281.5L03.311	36°	31	34	3000	2400	71	3000	>90
030281.5L03.321	76°	31	34	3000	2400	71	3000	>90
030281.5L04.311	36°	33	37	3000	2400	65	4000	>90
030281.5L04.321	76°	33	37	3000	2400	65	4000	>90
030281.5L07.311	36°	46	51	4400	3600	71	3000	>90
030281.5L07.321	76°	46	51	4400	3650	72	3000	>90
Degree of water and dust protection: IP20/44								
030421.5L01.311	36°	22	24	2000	1600	67	3000	>90
030421.5L01.321	76°	22	24	2000	1650	69	3000	>90
030421.5L02.311	36°	21	23	2000	1550	67	4000	>90
030421.5L02.321	76°	21	23	2000	1550	67	4000	>90
030421.5L03.311	36°	31	34	3000	2300	68	3000	>90
030421.5L03.321	76°	31	34	3000	2300	68	3000	>90
030421.5L04.311	36°	33	37	3000	2350	64	4000	>90
030421.5L04.321	76°	33	37	3000	2350	64	4000	>90
030421.5L07.311	36°	46	51	4400	3600	71	3000	>90
030421.5L07.321	76°	46	51	4400	3650	72	3000	>90

Luminous flux tolerance +/- 10%.

Code	Dimensions [mm] W H	Mounting dimensions [mm] W	Pallet quantity	Quantity in package	Net weight [kg]
Degree of water and dust protection: IP20					
030281.5L01.311	192 117	170	240	1	1.1
030281.5L01.321	192 117	170	240	1	1.1
030281.5L02.311	192 117	170	240	1	1.1
030281.5L02.321	192 117	170	240	1	1.1
030281.5L03.311	192 117	170	240	1	1.1
030281.5L03.321	192 117	170	240	1	1.1
030281.5L04.311	192 117	170	240	1	1.1
030281.5L04.321	192 117	170	240	1	1.1
030281.5L07.311	192 117	170	240	1	1.1
030281.5L07.321	192 117	170	240	1	1.1
Degree of water and dust protection: IP20/44					
030421.5L01.311	192 117	170	240	1	1.1
030421.5L01.321	192 117	170	240	1	1.1
030421.5L02.311	192 117	170	240	1	1.1
030421.5L02.321	192 117	170	240	1	1.1
030421.5L03.311	192 117	170	240	1	1.1
030421.5L03.321	192 117	170	240	1	1.1
030421.5L04.311	192 117	170	240	1	1.1
030421.5L04.321	192 117	170	240	1	1.1
030421.5L07.311	192 117	170	240	1	1.1
030421.5L07.321	192 117	170	240	1	1.1

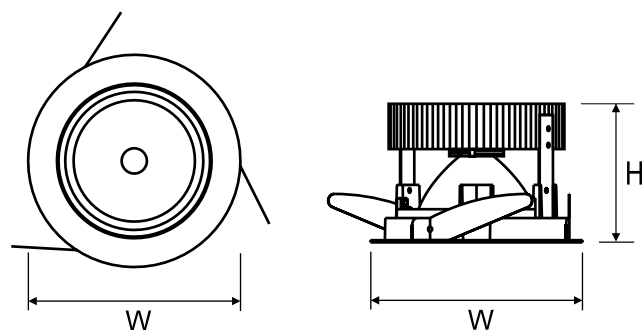


ACCESSORIES



150100.00518

Mounting plate

LIGHT BEAM CURVES

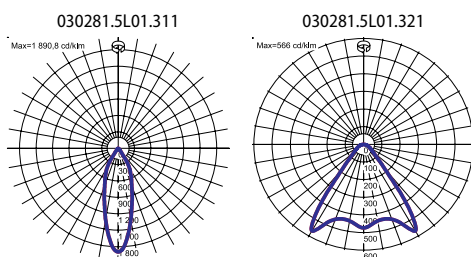

Luminous flux tolerance +/- 10%.

OTHER PROJECTS



Sieć sklepów JBC, Belgia

Luminous flux tolerance +/- 10%.