


m&h RWT35.50

Dimensional Drawing

Reference Only

Detailed drawings available upon request

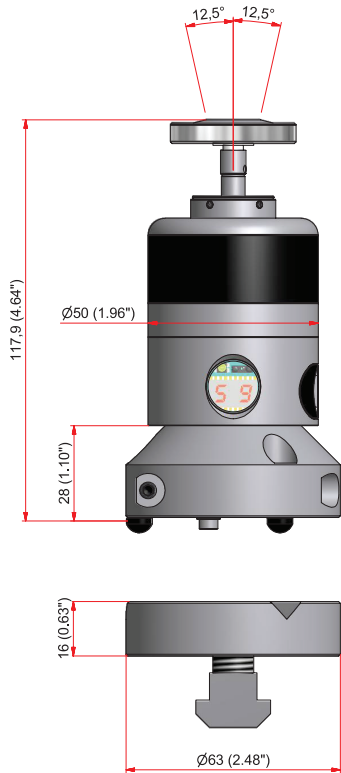

Specifications

TECHNICAL DATA

m&h RWT35.50


Unidirectional max. with repeatability	2 Sigma $\leq 1 \mu\text{m}$ at 100mm/min
Probing directions	$\pm X, \pm Y, -Z$
Max. stylus deflection	X/Y $\pm 12,5^\circ$; Z -5 mm
Trigger force	.45 - 1.79 lbs
Power supply	Battery 1 x 3,6 V $\frac{1}{2}$ AA
Protection class	IP68: EN60529
Temperature range	Operating: 50 °F – 122 °F
Material	Stainless Steel
Weight without base plate	Approx. 810 grams
Smallest tool for length measurement at probing speed 100 mm/min	$\varnothing 0,5 \text{ mm}$ (0.02")
Signal transmission	Radio-wave SCS

m&h RWR95.40

Dimensional Drawing

Reference Only

Detailed drawings available upon request

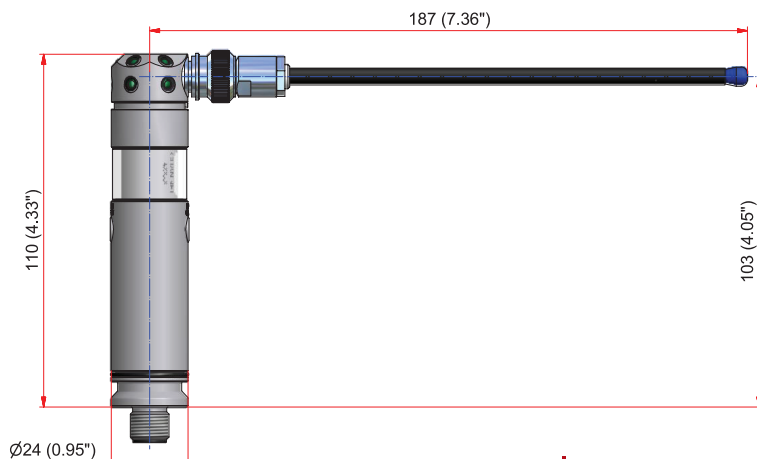

Specifications

TECHNICAL DATA

m&h RWR95.40

Number of channels	64
Channel spacing	25 KHz
Power supply	12 - 32 V, max. 100 mA
Weight	268 grams
Material	Stainless steel
Sealing, connected	IP68: EN60529 (10 m)
Temperature range	Operation: 50 °F – 122 °F
Installation	7 mounting configurations
Connecting cable	15 m