


m&h IRR91.50

Dimensional Drawing

Reference Only

Detailed drawings available upon request

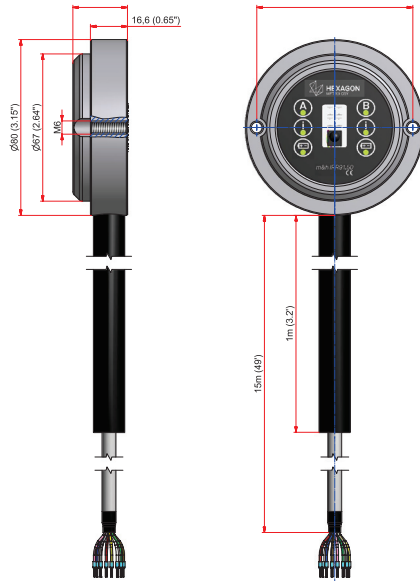

Specifications

TECHNICAL DATA	m&h IRR91.50
Receiving angle	100°
Transmission angle	60°
Signal evaluation	HDR+, HDR bidirectional, HDR dual, temperature probe, HDR
Power supply	12 - 32 VDC, max. 100 mA
Weight	IRR91.50-R = 1550 grams (with cable and protection tube)
Material	Stainless Steel
Protection class	IP68: EN60529 IEC529/DIN40050
Temperature Range	50 °F – 122 °F
Mounting	With 2x Cap head screw M5 + Bracket
Connecting cable	15 m